

1 Type


- SG** With star knob
- KGN** With wing knob
- HGN** With lever
- SKN** With wing knob
- STN** With T-handle

3 Version of the hook

- H1** Pivoting radius R=28

5 Identification no.

- 1** Without latch bracket
- 2** With latch bracket

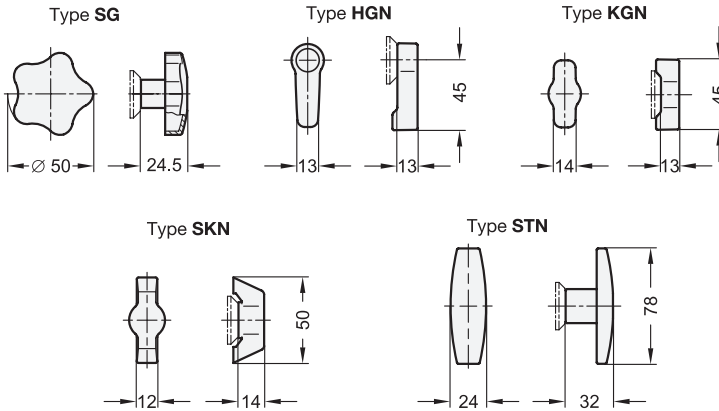

Hook distance A	d		h	
	Type SG / KGN / HGN	Type SKN / STN	Type SG / KGN / HGN	Type SKN / STN
18	28	32	4	6

* Dimensions of the latch bracket → Page XYZ

Specification

Lock housing

- Stainless steel
- AISI 303 for type SG / KGN / HGN
- AISI 316 for type SKN / STN

Operating element

- Stainless steel AISI 304 for type SG
Sheet metal drawn / Hub welded
- Stainless steel AISI CF-8 for type KGN / HGN
- Stainless steel AISI 316 for type SKN / STN

Other parts

Stainless steel AISI 304

RoHS

On request

- Hook-type latches with other hook distance A
- Hook with other pivoting radius R

Hook-type latches GN 115.8 with hook and catch are mainly used for sliding doors and flaps. The locking action is in radial direction to the axis of rotation, resulting in a wide variety of different uses.

The hook-type latches GN 115.8 are supplied with loosely enclosed hook.

see also... **Page**
GN 115.8 Hook-Type Latches (Housing Zinc Die Casting, with Operating Elements) QVX

Technical Information

Construction and assembly instructions	QVX
Overview Latch Types	QVX
Stainless Steel Characteristics	QVX

How to order

1 Type
2 Hook distance A
3 Version of the hook
4 Material
5 Identification no.

GN 115.8-HGN-18-H1-N-1

3.1
3.2
3.3
3.4
3.5
3.6
3.7
3.8
3.9
3.10