


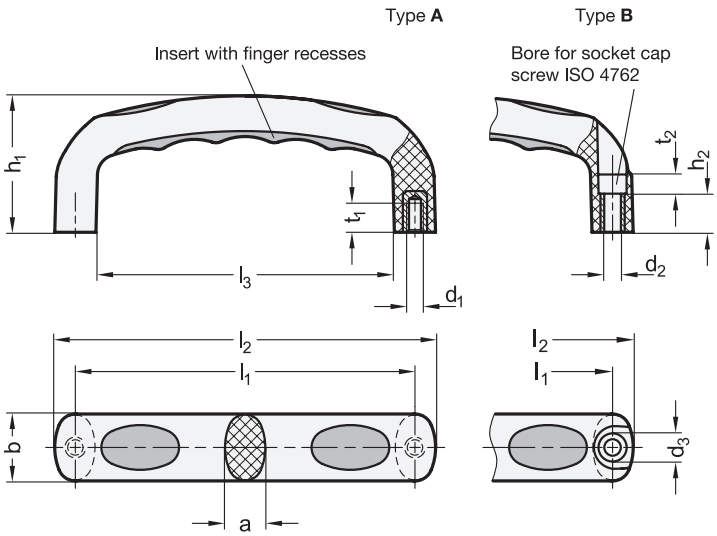

elesa
Original design M.343-SOFT

SOFT
GERMAN DESIGN AWARD

3 Type

A Mounting from the back (threaded blind bore)
B Mounting from the operator's side

1 l_1 ±0,5	2 d_1 Type A	2 d_2 Type B	a	b	d_3	h_1	h_2	l_2	l_3	t_1 min.	t_2
132	M 6	6,4	16	26	10,5	53	15	148	116	12	8,5
132	M 8	-	16	26	-	53	15	148	116	12	8,5

Specification

4

Base body
Plastic, polypropylene (PP)
- Black-gray, matte finish, similar to RAL 7021
- Bushings brass

Insert with finger recesses
Thermoplastic elastomer (TPE)
- Chemically bonded to the base body
- Operating temperature 0 °C to +80 °C
- Color
  - Orange, RAL 2004, matte finish **OR**
  - Gray, RAL 7024, matte finish **GR**
  - Red, RAL 3000, matte finish **RT**
  - Green, RAL 6017, matte finish **GN**
- Hardness 70 Shore A

RoHS

Cabinet U-handles GN 725.3 are characterized by their stability and their ergonomic design. The soft finger recesses (Softline product family) on the underside of the handle provide a particularly pleasant feel when gripping.
Cabinet U-handles GN 725.3 can be installed from the rear (type A) as well as from the operating side (type B).

see also...	Page
GN 328 Cabinet U-Handles (Aluminum)	QVX
GN 528 Cabinet U-Handles (Plastic)	QVX
GN 628 Cabinet U-Handles (Plastic)	QVX
GN 565.1 Cabinet U-Handles (Aluminum)	QVX

Technical Information

Product Family Softline	QVX
Strength Properties	QVX
Plastic Characteristics	QVX

How to order

1 2 3 4
GN 725.3-132-M8-A-RT

1	l_1
2	d_1 (d_2)
3	Type
4	Insert color