

# CAUBQ


## GUIDE PILLAR WITH HOLE DIN 9833

FÜHRUNGSSÄULE MIT HOHLBOHRUNG DIN 9833 | COLONNA FORATA DIN 9833

DIN 9833 / ISO 9182-3



|                                                                  |       |            |                                              |
|------------------------------------------------------------------|-------|------------|----------------------------------------------|
| Material: steel<br>Hardness: 60÷64 HRC<br>Execution: fine ground | STOCK | 3D-CAD<br> | HOW TO ORDER<br>CAUBQ * D1 * L1 (CAUBQ80200) |
|------------------------------------------------------------------|-------|------------|----------------------------------------------|

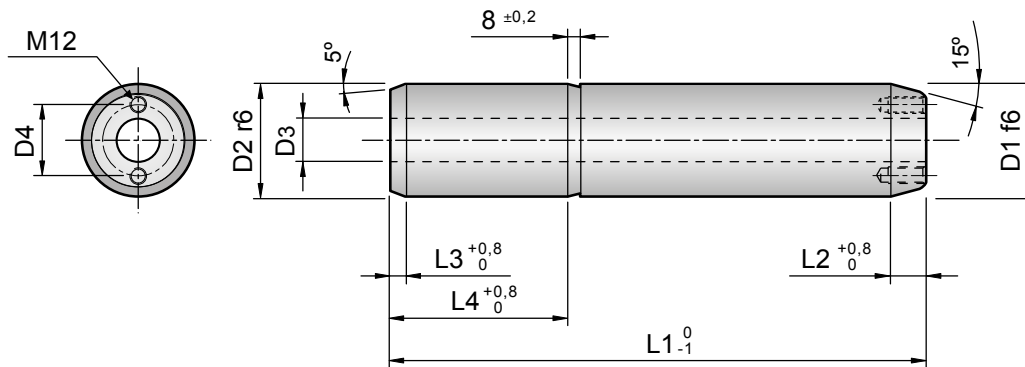

| D1  | D2  | D3 | D4  | L2 | L3 | L4  | L1  |     |     |     |     |     |     |     |
|-----|-----|----|-----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|     |     |    |     |    |    |     | 200 | 224 | 250 | 280 | 315 | 355 | 400 | 450 |
| 80  | 80  | 40 | 58  | 10 | 4  | 100 | •   | •   | •   | •   | •   | •   | •   | •   |
| 100 | 100 | 50 | 72  |    |    | 125 |     | •   | •   | •   | •   | •   | •   |     |
| 125 | 125 | 65 | 90  | 12 | 5  | 140 |     |     |     | •   | •   | •   | •   | •   |
| 160 | 160 | 95 | 132 |    |    | 180 |     |     |     |     |     | •   | •   | •   |