

CEAQIN


DEMOUNTABLE GUIDE PILLAR

FÜHRUNGSSÄULE MIT BUND | COLONNA ESTRAIBILE

DIN 9825 / ~ ISO 9182-5



Material: steel Hardness: 60 ÷ 63 HRC (induction) Execution: superfinished	STOCK	3D-CAD	HOW TO ORDER CEAQIN * D1 * L1 (CEAQIN15100)
----------------------------------------------------------------------------------	-------	--------	------------------------------------------------

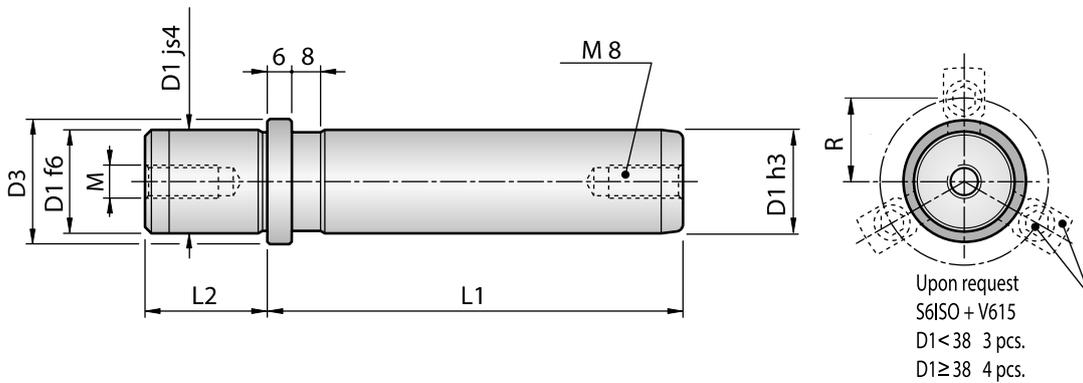

D1	D3	R	M	L2	L1														
					100	112	125	140	160	180	200	224	250	280	315	355	400		
15 - 16	22	16,5	M8	20	•	•	•	•	•	•	•								
19 - 20	25	18		23	•	•	•	•	•	•	•								
24 - 25	32	21,5		30	•	•	•	•	•	•	•	•							
30 - 32	40	25,5		37		•	•	•	•	•	•	•	•	•	•				
38 - 40	50	30,5					•	•	•	•	•	•	•	•	•	•	•		
48 - 50	63	37			47				•	•	•	•	•	•	•	•	•	•	•
60 - 63	80	45,5							•	•	•	•	•	•	•	•	•	•	
80	95	53	M12	60						•	•	•	•	•	•	•	•		