


L0	Tolerance	Toll. MIN	Toll. MAX
25	± 0,75 mm	24,25	25,75
32		31,25	32,75
38		37,25	38,75
44		43,25	44,75
51		50,25	51,75
64		63,25	64,75
76	± 1%	75,24	76,76
89		88,11	89,89
102		100,98	103,02
115		113,85	116,15
127		125,73	128,27
139		137,61	140,39
152		150,48	153,52
178		176,22	179,78
203		200,97	205,03
254		251,46	256,54
305		301,95	308,05

ISO 10243:2019(E)

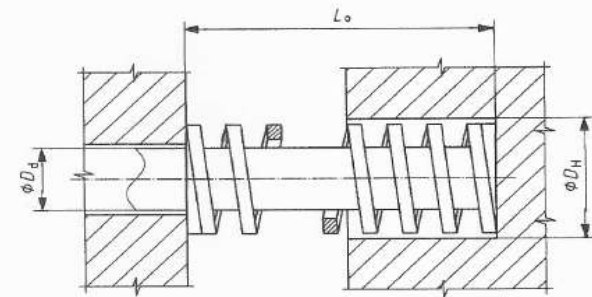

Key
 L_0 free length
 D_d rod diameter
 D_H hole diameter

Figure 1 — Compression springs

4.2 Tolerances for free length, L_0

The tolerances for free length, L_0 , shall comply with [Figure 1](#) and [Table 1](#).

Table 1 — Tolerances of free length