Stainless Steel-Levelling feet

with turned foot plate

GN 21

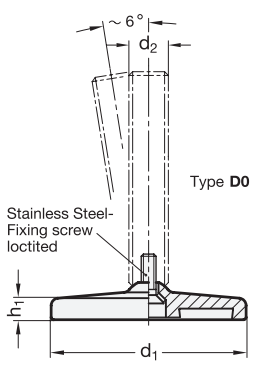



GN 23

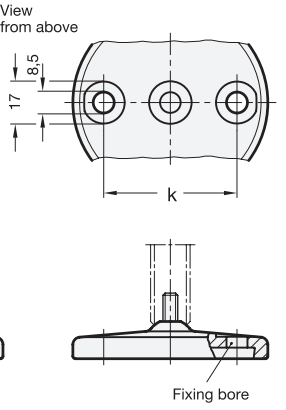

Inox Stainless Steel

4 Type (Foot plate)

D0 fine turned, without rubber underlay

D1 fine turned, with rubber underlay, inlaid, black

1 d_1	2 d_2	3 l_1 Version S / SK				l_1 Version T / TK and U / UK					3 l_2 Version V / VK					3 $l_3 \approx$ Version W				3 l_7 Ver. X	k
80	M 8	40	50	63	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	34	54,5
80	M 10	50	60	80	100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	37	54,5
80	M 12	60	80	100	125	-	-	-	-	-	-	-	-	-	-	-	-	-	-	40	54,5
80	M 16	-	-	-	-	75	100	125	150	200	75	100	125	150	118	143	168	193	46	54,5
80	M 20	-	-	-	-	75	100	125	150	200	100	125	150	200	143	168	193	243	54	54,5
80	M 24	-	-	-	-	100	125	150	200	-	100	150	200	-	168	218	268	-	-	54,5
100	M 8	40	50	63	-	-	-	-	-	-	-	-	-	-	-	-	-	-	35	70,5
100	M 10	50	60	80	100	-	-	-	-	-	-	-	-	-	-	-	-	-	38	70,5
100	M 12	60	80	100	125	-	-	-	-	-	-	-	-	-	-	-	-	-	41	70,5
100	M 16	-	-	-	-	75	100	125	150	200	75	100	125	150	119	144	169	194	47	70,5
100	M 20	-	-	-	-	75	100	125	150	200	100	125	150	200	144	169	194	244	55	70,5
100	M 24	-	-	-	-	100	125	150	200	-	100	150	200	-	169	219	269	-	-	70,5
120	M 20	-	-	-	-	75	100	125	150	200	-	-	-	-	-	-	-	-	59	95
120	M 24	-	-	-	-	100	125	150	200	-	-	-	-	-	-	-	-	-	-	95
120	M 30	-	-	-	-	100	125	150	200	-	-	-	-	-	-	-	-	-	-	95

Specification

- Foot plate
  Stainless Steel AISI 304
- Screws
  Stainless Steel AISI 303
- Hexagon nut ISO 4032
  Stainless Steel AISI 304
- Rubber inlay inlaid
  Perbunan® (NBR), 70 Shore A
- *Stainless Steel characteristics*
  → Main catalogue page 1144
- *Elastomer characteristics*
  → Main catalogue page 1140
- RoHS compliant

Information

Stainless Steel-Levelling feet GN 21 / GN 23 will be delivered mounted and are not removable.

see also...

- *Stainless Steel-Levelling feet GN 340.5 → Page 824*
- *Stainless Steel-Levelling feet GN 440.5 → Page 832*

Stainless Steel-Levelling foot

1 2 3 4 5

GN 21-100-M20-55-D1-X

1	d_1
2	d_2
3	l_1 (l_2, l_3, l_7)
4	Type (Foot plate)
5	Version of the screw

Stainless Steel-Levelling foot

1 2 3 4 5

GN 23-80-M10-50-D0-S

1	d_1
2	d_2
3	l_1 (l_2, l_3, l_7)
4	Type (Foot plate)
5	Version of the screw

Versions of the screw



5

S without nut
SK with nut

External heagon at the bottom
M 8, M 10, M 12



5

T without nut
TK with nut

Wrench flat at the bottom
M 16, M 20, M 24, M 30
„not dipping“ version



5

U without nut
UK with nut

Heagon socket at the top
Wrench flat at the bottom
M 16, M 20, M 24, M 30



5

V without nut
VK with nut

External heagon at the top
Wrench flat at the bottom
M 16, M 20, M 24



5

W with adjustable sleeve

Hygienic version
Wrench flat at the bottom
M 16, M 20, M 24



5

X with female-thread

External heagon
Female thread
M 8, M 10, M 12, M 16, M 20

d_1	d_2	d_3	h_1	h_2	h_3	h_4	h_5	l_4	l_5	l_6	A/F_1	A/F_2	A/F_3	A/F_4	A/F_5	A/F_6	A/F_7	t
80	M 8	-	8,5	2	19,5	-	-	-	-	-	17	-	-	-	-	-	14	8
80	M 10	-	8,5	2	19,5	-	-	-	-	-	17	-	-	-	-	-	14	10
80	M 12	-	8,5	2	19,5	-	-	-	-	-	17	-	-	-	-	-	17	12
80	M 16	24	8,5	2	-	25,5	21,5	45	45	29	-	12	8	10	12	20	22	16
80	M 20	30	8,5	2	-	27	23	56	56	36	-	15	10	13	16	24	27	20
80	M 24	35	8,5	2	-	30,5	26	67	67	42	-	19	12	17	20	30	-	-
100	M 8	-	9	3	20,5	-	-	-	-	-	17	-	-	-	-	-	14	8
100	M 10	-	9	3	20,5	-	-	-	-	-	17	-	-	-	-	-	14	10
100	M 12	-	9	3	20,5	-	-	-	-	-	17	-	-	-	-	-	17	12
100	M 16	24	9	3	-	26,5	22,5	45	45	32	-	12	8	10	12	20	22	16
100	M 20	30	9	3	-	28	24	56	56	40	-	15	10	13	16	24	27	20
100	M 24	35	9	3	-	31,5	27	67	67	48	-	19	12	17	20	30	-	-
120	M 20	-	12	3,5	-	32	-	-	-	-	-	15	10	-	-	-	27	20
120	M 24	-	12	3,5	-	35,5	-	-	-	-	-	19	12	-	-	-	-	-
120	M 30	-	12	3,5	-	39,5	-	-	-	-	-	24	12	-	-	-	-	-