


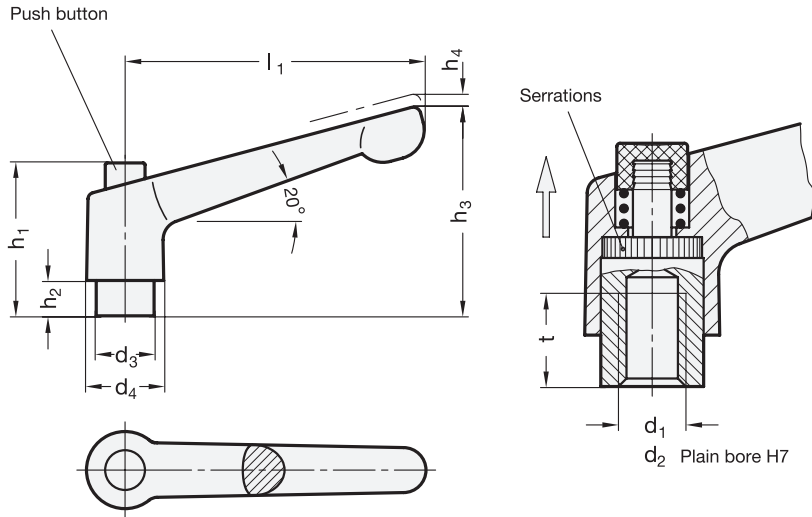

1	2	2										
l ₁	d ₁ Thread			d ₂ H7 Bore		d ₃	d ₄	h ₁	h ₂	h ₃	h ₄ Stroke	t min.
30	M 3	-	-	-	-	10	13	26,5	4	31	3,5	7
30	M 4	M 5	M 6	B 5	B 6	10	13	26,5	4	31	3,5	9
45	M 4	M 5	M 6	B 5	B 6	10	13	26,5	4	35	3,5	9
63	M 6	M 8	-	B 8	-	13,5	17,5	32,5	6,5	45	4	11
78	M 8	M 10	-	B 8	B 10	16	21	37,5	8	55	4	14

Specification

- Handle
Zinc die casting
- plastic coated
black, RAL 9005
textured finish ● **SW**
- Push button
Plastic
black, RAL 9005 ● **S**
orange, RAL 2004 ● **O**
grey, RAL 3035 ● **G**
- Threaded insert
Steel, blackened
- Pin for push button
Stainless Steel
- ISO-Fundamental Tolerances → Page xx
- RoHS compliant

On request

- Handle in GN 300 colours

Information

Adjustable hand levers GN 303 are ideal whenever parts have to be clamped in a confined space or in a particular lever position. The centre insert is connected to the lever via serrations which can easily be disengaged.

The push button is a design element that offers an easy disengagement. Its use is limited to applications where dismantling of the lever for installation is not required.

see also...

- Adjustable hand levers GN 303.1
(with Stainless Steel-insert) → Page xx

How to order	1	l ₁
	2	d ₁ (d ₂)
	3	Handle colour
	4	Push button colour

GN303-78-M10-SW-G